


FEATURES

- 19-20g operating spring force
-

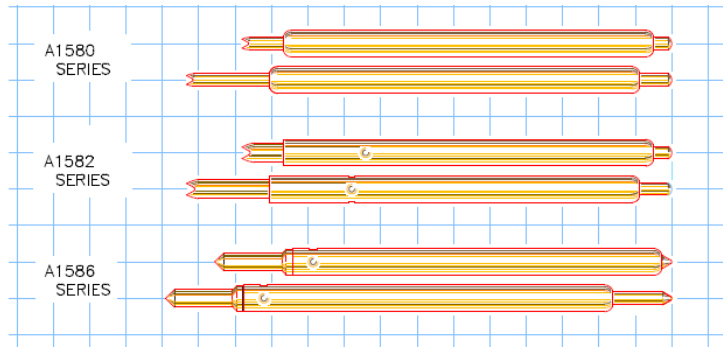


GENERAL DESCRIPTION

The A1586 series spring probes from Signal Integrity Inc. are designed to meet the rigorous test requirements driven by the fast risetimes and increased need for RF and wireless bandwidth in the high volume, very fine pitch test socket market. Along with speed and accuracy, these probes are designed to operate at pitches down to 0.4mm, specifically tailored to the ultra fine packaging these markets demand.

SERIES A1586 MODELS: ORDERING INFORMATION

A Series 0.4mm (.0157) Pitch				
Model	Length Operating / Initial inches [mm]	DUT Plunger and Plating	Spring	Operating Spring Force
A1586-A1	.199" [5.06] / .211 [5.36]	Kelvin - Gold	Music Wire	20 Grams
A1586-B2	.199" [5.06] / .219" [5.56]		Stainless Steel	19 Grams
A1586-C3				
A1586-D4				
A1586-E5		Ogive - Gold		
A1586-F6	.234" [5.94] / .256" [6.50]	Kelvin - Gold		20 Grams
A1586-G7	.199" [5.06] / .219" [5.56]		Music Wire	31 Grams

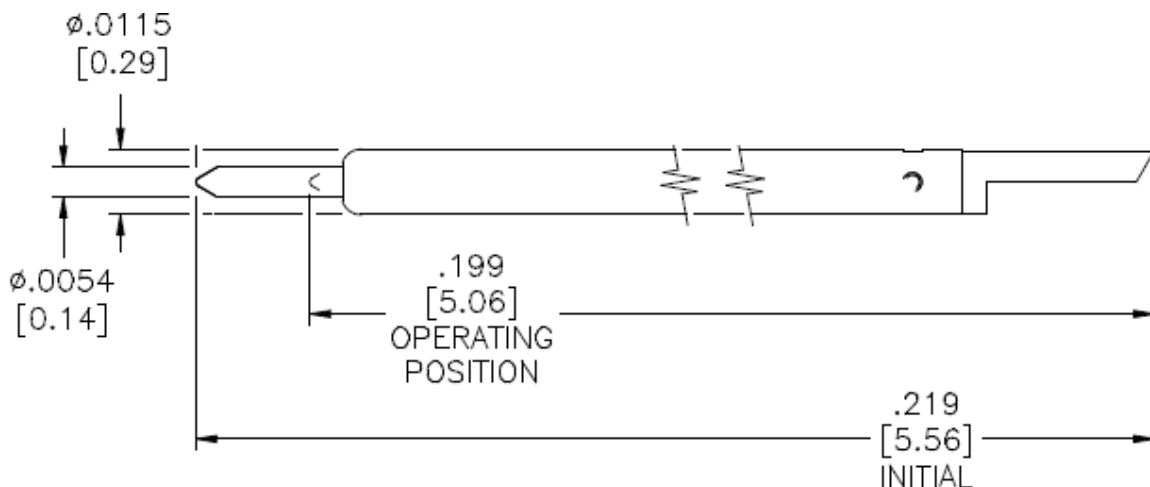

Signal Integrity, Inc.

104 County Street, Ste. 210, Attleboro, MA 02703

Tel: 1-508-226-6480 Fax: 1-508-226-6488 Internet: www.signalin.com

Signal Integrity makes no representation that the use of its products described herein, or the use of other technical information contained herein, will not infringe on existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.