


**FEATURES**

- <-1db insertion loss to 12.4GHz
- <2:1VSWR to 11.2GHz
- 24g operating spring force
- $Z_0 = 35.8\Omega$
- <34.5ps risetime
- 70milliOhms contact resistance
- 4 Amps max. drive current

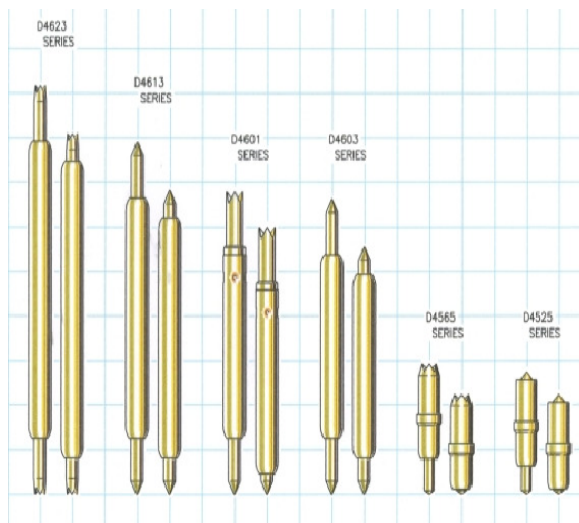

**GENERAL DESCRIPTION**

The D4603 series spring probes from Signal Integrity Inc. are designed to meet the rigorous test probe bandwidth of the wireless and RF test markets as well as very fast rise times in test applications for telecommunication and broadband data communications system-on-a-chip devices. The risetime requirements for these devices are usually well below 150 picoseconds. Along with speed and accuracy, these probes are designed for testing very fine pitch to 0.8mm, well suited to the packaging constraints driven by the consumer wireless market.

The high bandwidth of these probes provides very low insertion loss up to 12.4GHz. These probes will provide transparent operation on Bluetooth, 802.11b and 3G wireless protocol devices as well as exceed the test probe demands of proprietary microwave communications devices and systems.

With an impulse risetime of less than 34.5ps and a propagation delay of 24ps, the AC performance of the series D4603 probes are transparent for test applications and interconnections solutions that operate in high speed CMOS, SiGe and GaAs technologies.

**SERIES D4603 MODELS: ORDERING INFORMATION**

D Series 0.8mm (.0315) Pitch				
Model	Length – Operating/Initial inch [mm]	DUT Plunger and Plating	Spring	Operating Spring Force
D4603-A1	.181 [4.59] / .209 [5.30]	Crown - Gold	Stainless Steel	24 Grams
D4603-B2		Conical - Gold		24 Grams
D4603-D4		Crown - Gold		24 Grams
D4603-E5		Crown - Palladium		24 Grams
D4603-F6		Crown - Palladium		34 Grams
D4603-H8		Conical - Gold		
D4603-J1		Crown - Gold		
D4603-C3		.191 [4.85] / .219 [5.56]		Crown - Gold

**FUNCTIONAL SPECIFICATIONS**

Model	D4603-B2			
Time Domain	Min.	Typ.	Max.	Units
TDT Risetime into 50Ω			34.5	ps
TDR Risetime open circuit			42.0	ps
TDR Risetime short circuit			51.0	ps
Signal Delay into 50Ω	24.0			ps
Frequency Domain				
Insertion Loss <-1db	12.4			GHz
<-3db	>40.0			GHz
Return Loss, S11 <-10db	11.0			GHz
<-20db	4.0			GHz
VSWR <2:1	11.2			GHz
Equivalent Circuit Parameters				
Pin Inductance		1.16		nH
Pin Capacitance to ground		0.63		pF
Mutual Inductance		0.22		nH
Mutual Capacitance		0.09		pF
Transmission Line Zo		35.8		Ω
Tl		24.0		ps
DC Parameters				
Contact Resistance		70		mΩ
Maximum Rating				
Drive Current		4		A

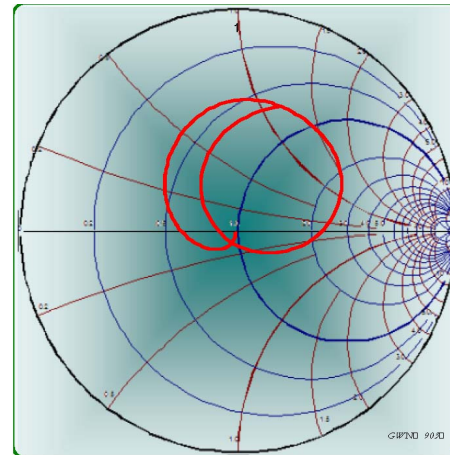


Figure 2: Measurement into 50Ω, D4603-B2

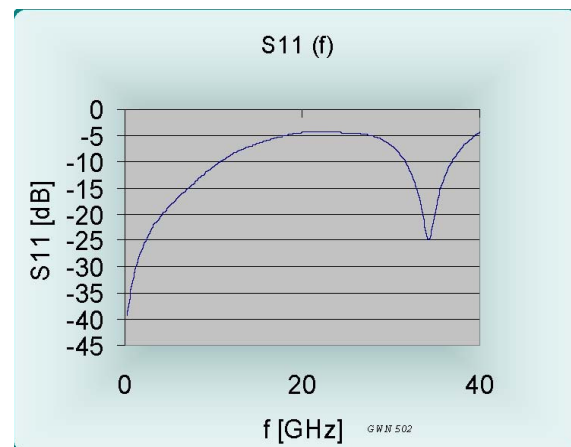


Figure 3: Return Loss, S11, D4603-B2

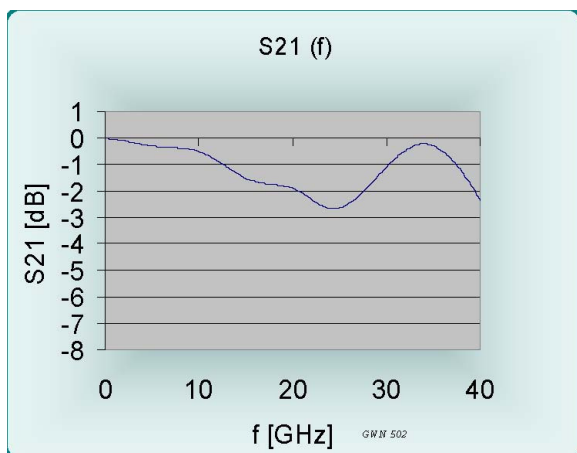


Figure 1: Insertion Loss, S21, D4603-B2

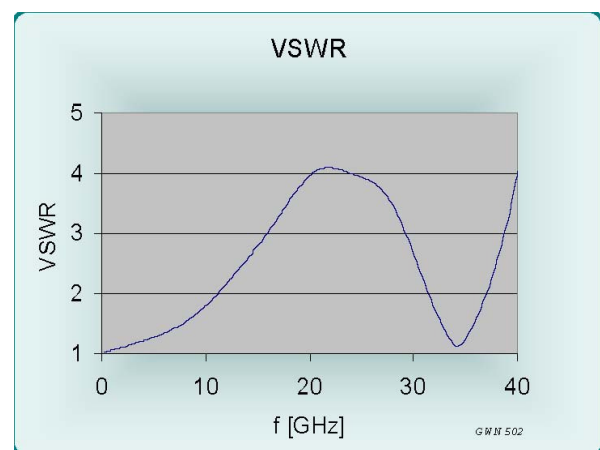


Figure 4: VSWR, D4603-B2

EQUIVALENT CIRCUITS / SPICE MODELS

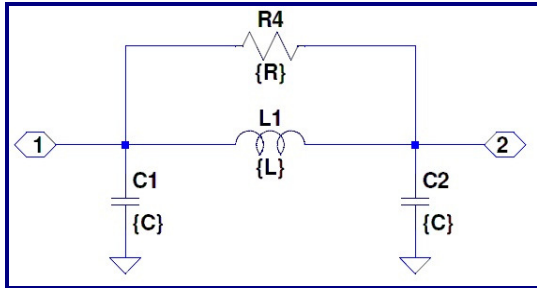


Figure 5: Pi Equivalent, Valid to <9GHz

C1, C2	0.313	pF
L1	1.16	nH
R4	500	Ohms

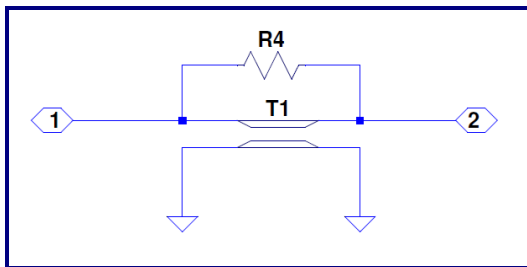


Figure 6: Distributed, Valid to >40GHz

Z0	35.8	Ohms
L	24.0	ps
R4	1000	Ohms

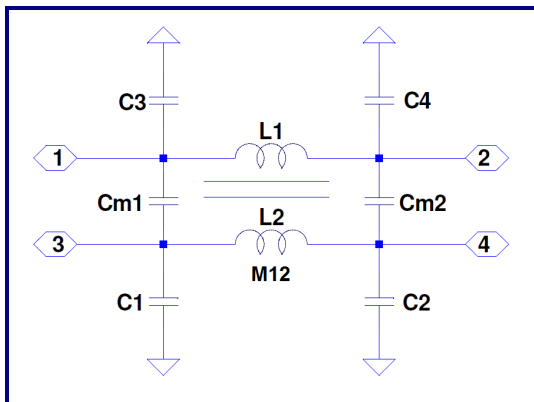


Figure 7: Lumped, Mutual Elements

C1,2,3,4	0.313	pF
Cm1, Cm2	0.044	pF
L1, L2	1.16	nH
M12	0.224	nH

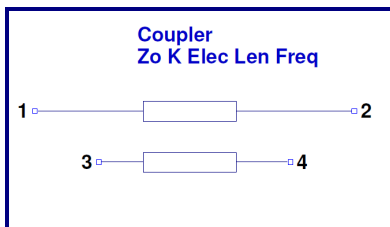


Figure 8: Transmission Line Equivalent for Crosstalk

Z0	35.8	Ohms
Tl	24.0	ps


**D SERIES MODELS**

D Series 0.8mm (.0315) pitch

Probe Series	Initial Length		Operating Position		Spring Force	Self Inductance	Insertion Loss < -1db to	Typical Contact Resistance	Maximum Current
	inch/mm		inch/mm						
<a href="#">D4525</a>	.087"	2.21	.071"	1.80	30 g	0.5 nH	17.0 GHz	20 mOhms	6.0 A
D4565	.092"	2.33	.071"	1.80	30 g	0.5 nH	17.0 GHz	25 mOhms	6.0 A
<a href="#">D4595</a>	.154"	3.91	.128"	3.25	38 g	0.82 nH	19.5 GHz	30 mOhms	3.0 A
<a href="#">D4601</a>	.214"	5.43	.186"	4.72	24-34 g	1.0 nH	12.8 GHz	50 mOhms	6.0 A
<a href="#">D4603</a>	.209"	5.30	.181"	4.59	24 g	1.16 nH	12.4 GHz	70 mOhms	4.0 A
<a href="#">D4613</a>	.249"	6.32	.213-.216"	5.49	24-34 g	1.25 nH	14.3 GHz	40 mOhms	2.15 A
<a href="#">D4623</a>	.289"	7.33	.253"	6.43	34 g	1.55 nH	8.2 GHz	60 mOhms	5.4 A
D4823	.289"	7.33	.253"	6.43	28 g	-	-	-	-
<a href="#">D4693</a>	.185"	4.71	.157"	4.00	24-34 g	0.92 nH	18.3 GHz	40 mOhms	3.0 A
<a href="#">D4694</a>	.185"	4.71	.157"	4.00	23-36 g	0.80 nH	7.8 GHz	40 mOhms	3.0 A
<a href="#">D4697</a>	.339"	8.61	.295"	7.50	32 g	2.01 nH	8.6 GHz	45 mOhms	2.6 A

**MECHANICAL DIMENSIONS**

INCHES [MM]

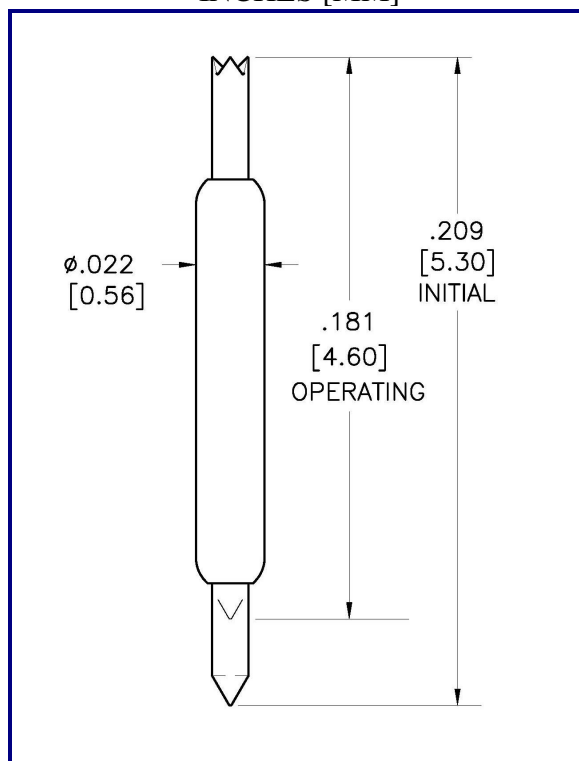

Signal Integrity, Inc.

104 County Street, Ste. 210, Attleboro, MA 02703

 Tel: 1-508-226-6480 Fax: 1-508-226-6488 Internet: [www.signalin.com](http://www.signalin.com)

Signal Integrity makes no representation that the use of its products described herein, or the use of other technical information contained herein, will not infringe on existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.