


**FEATURES**

- <-1db insertion loss to >40 GHz
- <2:1 VSWR to >40 GHz
- 24/35g operating spring force
- $Z_0 = 39.1 \Omega$
- <13.9ps risetime
- 20milliOhms contact resistance
- 4.3 Amps max. drive current

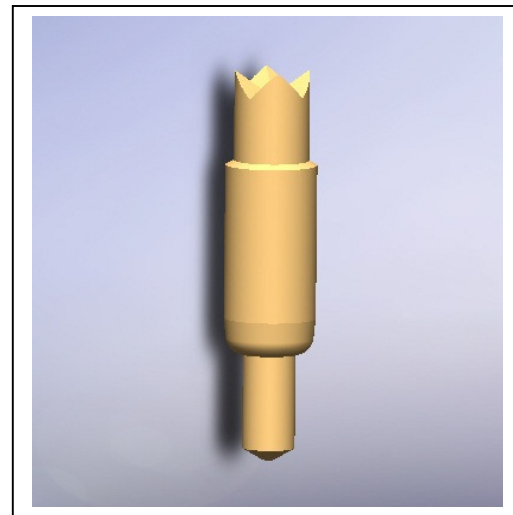

**GENERAL DESCRIPTION**

The E5566 spring probe from Signal Integrity Inc. is designed to meet the rigorous test requirements driven by the ultra fast risetimes in the digital domain, and high bandwidth, high frequency RF / microwave specifications for the wireless market. Along with speed and accuracy, these probes are designed to operate at pitches to 1.0mm, specifically for the fine pitch packaging these markets demand.

The ultra high bandwidth of these probes provides very low insertion loss >40 GHz. These probes will provide transparent operation on Bluetooth, 802.11b and 3G wireless protocol devices as well as exceed the test probe demands of proprietary microwave communications devices and systems.

With an impulse risetime of less than 33ps and a propagation delay of 15.1ps, the E5566 has more than enough performance for probe applications and interconnection solutions in broadband digital. These probes are ideal for building transparent test channels or interconnection solutions that must address data communication and source synchronous memory busses. Among others, these include Infiniband, PCI-Express, Source Synchronous DDR, Rambus<sup>tm</sup>, HyperTransport and 10Gb Ethernet.

E5566 Series 1.0mm (.0394) Pitch					
Model	Length Operating / initial inch [mm]	DUT Plunger and Plating	Interface Plunger	Spring	Operating Spring Force
E5566-A1	.098 [2.49] / .121 [3.08]	Crown - Gold	Spherical	Stainless Steel	35 Grams
E5566-B2		Conic - Gold			
E5566-C3		Crown - Gold			24 grams
E5566-D4		Crown - Gold Anti-Diffusion			
E5566-E5		Crown -Solid Precious Metal Alloy			

**FUNCTIONAL SPECIFICATIONS**

Model	E5566-A1			
Time Domain	Min.	Typ.	Max.	Units
TDT Risetime into 50Ω			33.0	ps
TDR Risetime open circuit			51.0	ps
TDR Risetime short circuit			37.5	ps
Signal Delay into 50Ω		15.1		ps
<b>Frequency Domain</b>				
Insertion Loss <-1db	34		>40	GHz
<-3db	>40		>40	GHz
Return Loss, S11 <-10db	>40			GHz
<-20db	2.8			GHz
VSWR <2:1	>40		>40	GHz
<b>Equivalent Circuit Parameters</b>				
Pin Inductance		0.49		nH
Pin Capacitance to ground		0.16		pF
Mutual Inductance		.099		nH
Mutual Capacitance		0.03		pF
Transmission Line Zo		39.1		Ω
Tl		13.9		ps
<b>DC Parameters</b>				
Contact Resistance		20		mΩ
<b>Maximum Rating</b>				
Drive Current		4.3		A

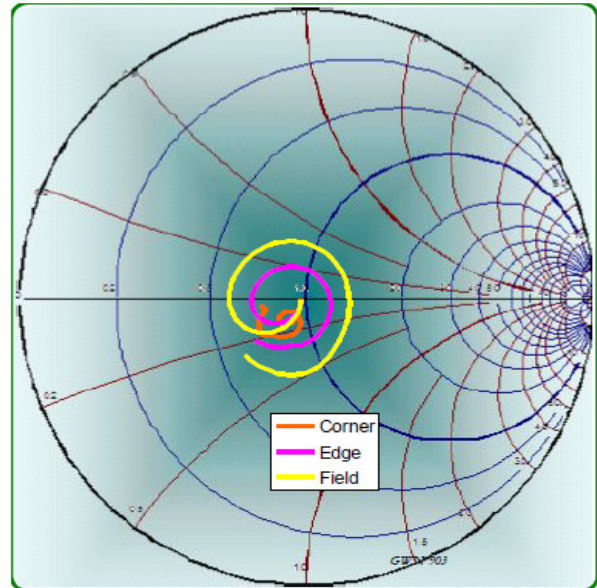


Figure 2: Measurement into 50Ω, E5566-A1

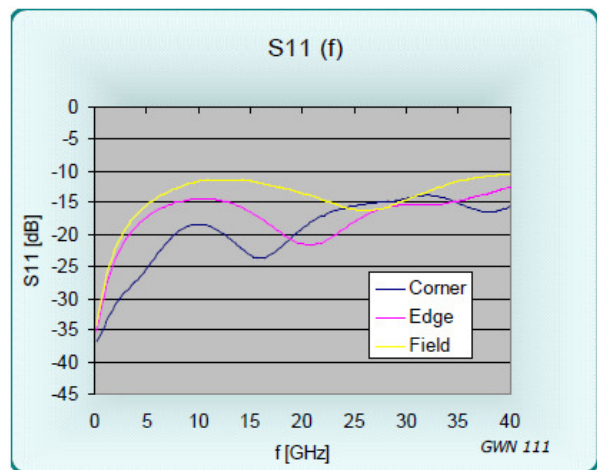


Figure 3: Return Loss, S11, E5566-A1

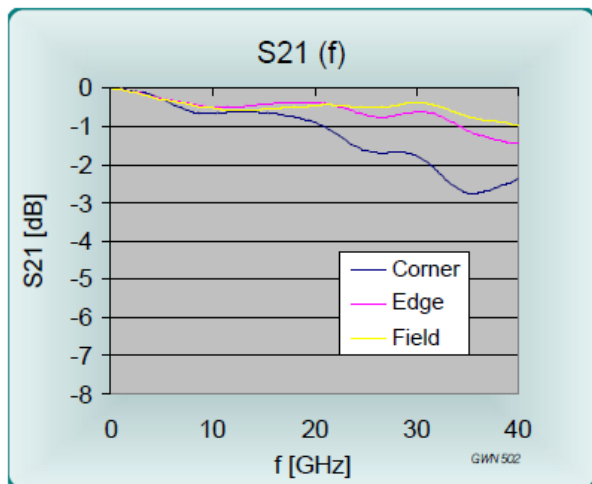


Figure 1: Insertion Loss, S21, E5566-A1


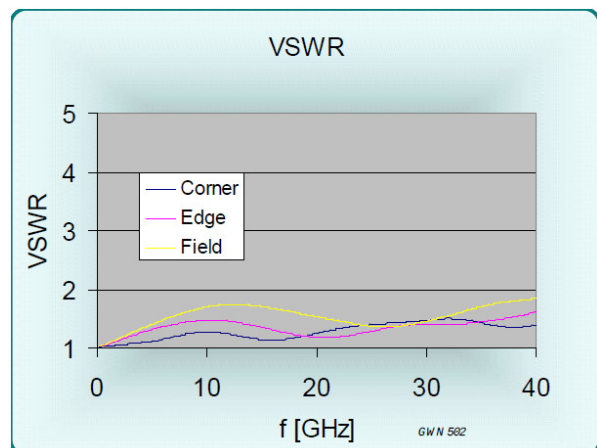



Figure 4: VSWR, E5566-A1

EQUIVALENT CIRCUITS / SPICE MODELS

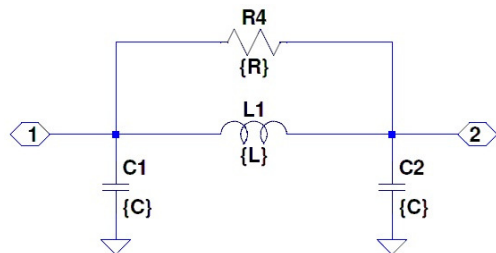


Site	Cg = C1+C2	L1	R4
Corner	0.280 pF	0.80 nH	300 Ω
Edge	0.317 pF	0.62 nH	400 Ω
Field	0.331 pF	0.49 nH	300 Ω
Diagonal	0.331 pF	0.49 nH	300 Ω

Figure 5: Pi Equivalent, Valid <16GHz

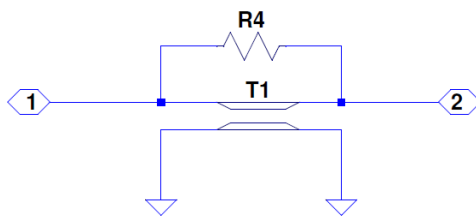

	Zo	L	R4
Corner	53.5 Ω	14.98 ps	700 Ω
Edge	44.3 Ω	14.03 ps	1500 Ω
Field	38.7 Ω	12.78 ps	2000 Ω

Figure 6: Transmission Line Model Valid to >40GHz

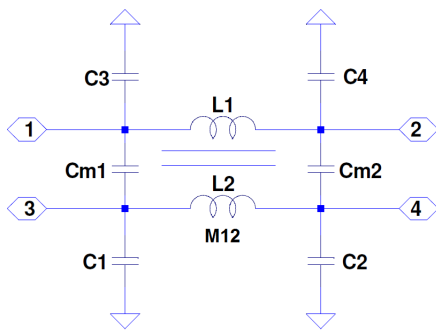

Site	C1,2,3,4	Cm1,Cm2	L1,L2	M
Corner	0.140	0.042 pF	0.80	0.285 nH
Edge	0.158	0.043 pF	0.62	0.215 nH
Field	0.165	0.035 pF	0.49	0.119 nH
Diagonal	0.165	0.006 pF	0.49	0.099 nH


Figure 7: Lumped, Mutual Elements



Z0	39.1	Ohms
Lel	13.9	ps
k	0.24	
f	39.1	Ghz

Figure 8: Transmission Line Equivalent for Crosstalk

**MECHANICAL DIMENSIONS**  
INCHES [MM]

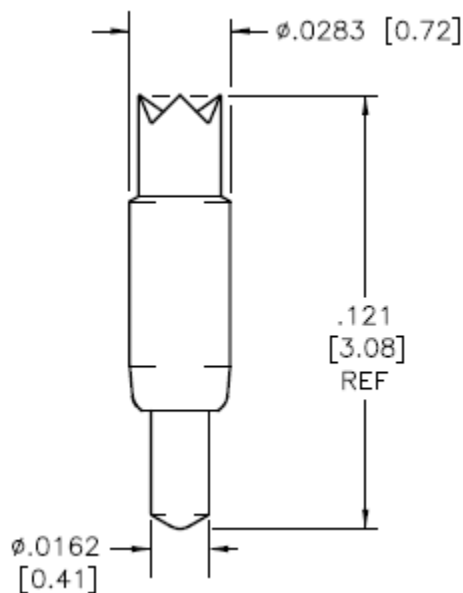

E Series 1.0mm (.0394) pitch									
Probe Series	Initial Length inch/mm		Operating Position inch/mm		Operating Spring Force	Self Inductance	Insertion Loss < -1db to	Typical Contact Resistance	Maximum Current
<a href="#">E5566</a>	.121"	3.08	.098"	2.49	24-35 g	0.49 nH	>40 GHz	20 mOhms	4.3 A
<a href="#">E5533</a>	.144"	3.66	.119"	3.02	25-40 g	0.72 nH	25.3 GHz	20 mOhms	8.5 A
<a href="#">E5548</a>	.180"	4.57	.156"	3.96	20-39 g	1.04 nH	14.5 GHz	25 mOhms	7.0 A
<a href="#">E5593</a>					27 g	1.14 nH	31.5 GHz	20 mOhms	6.0 A
<a href="#">E5656</a>					28-36 g	0.90 nH	13.9 GHz	20 mOhms	6.0 A

**Signal Integrity, Inc.**  
 104 County Street, Ste. 210, Attleboro, MA 02703  
 Tel: 1-508-226-6480 Fax: 1-508-226-6488 Internet: [www.signalin.com](http://www.signalin.com)

Signal Integrity makes no representation that the use of its products described herein, or the use of other technical information contained herein, will not infringe on existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.